

FIG.1

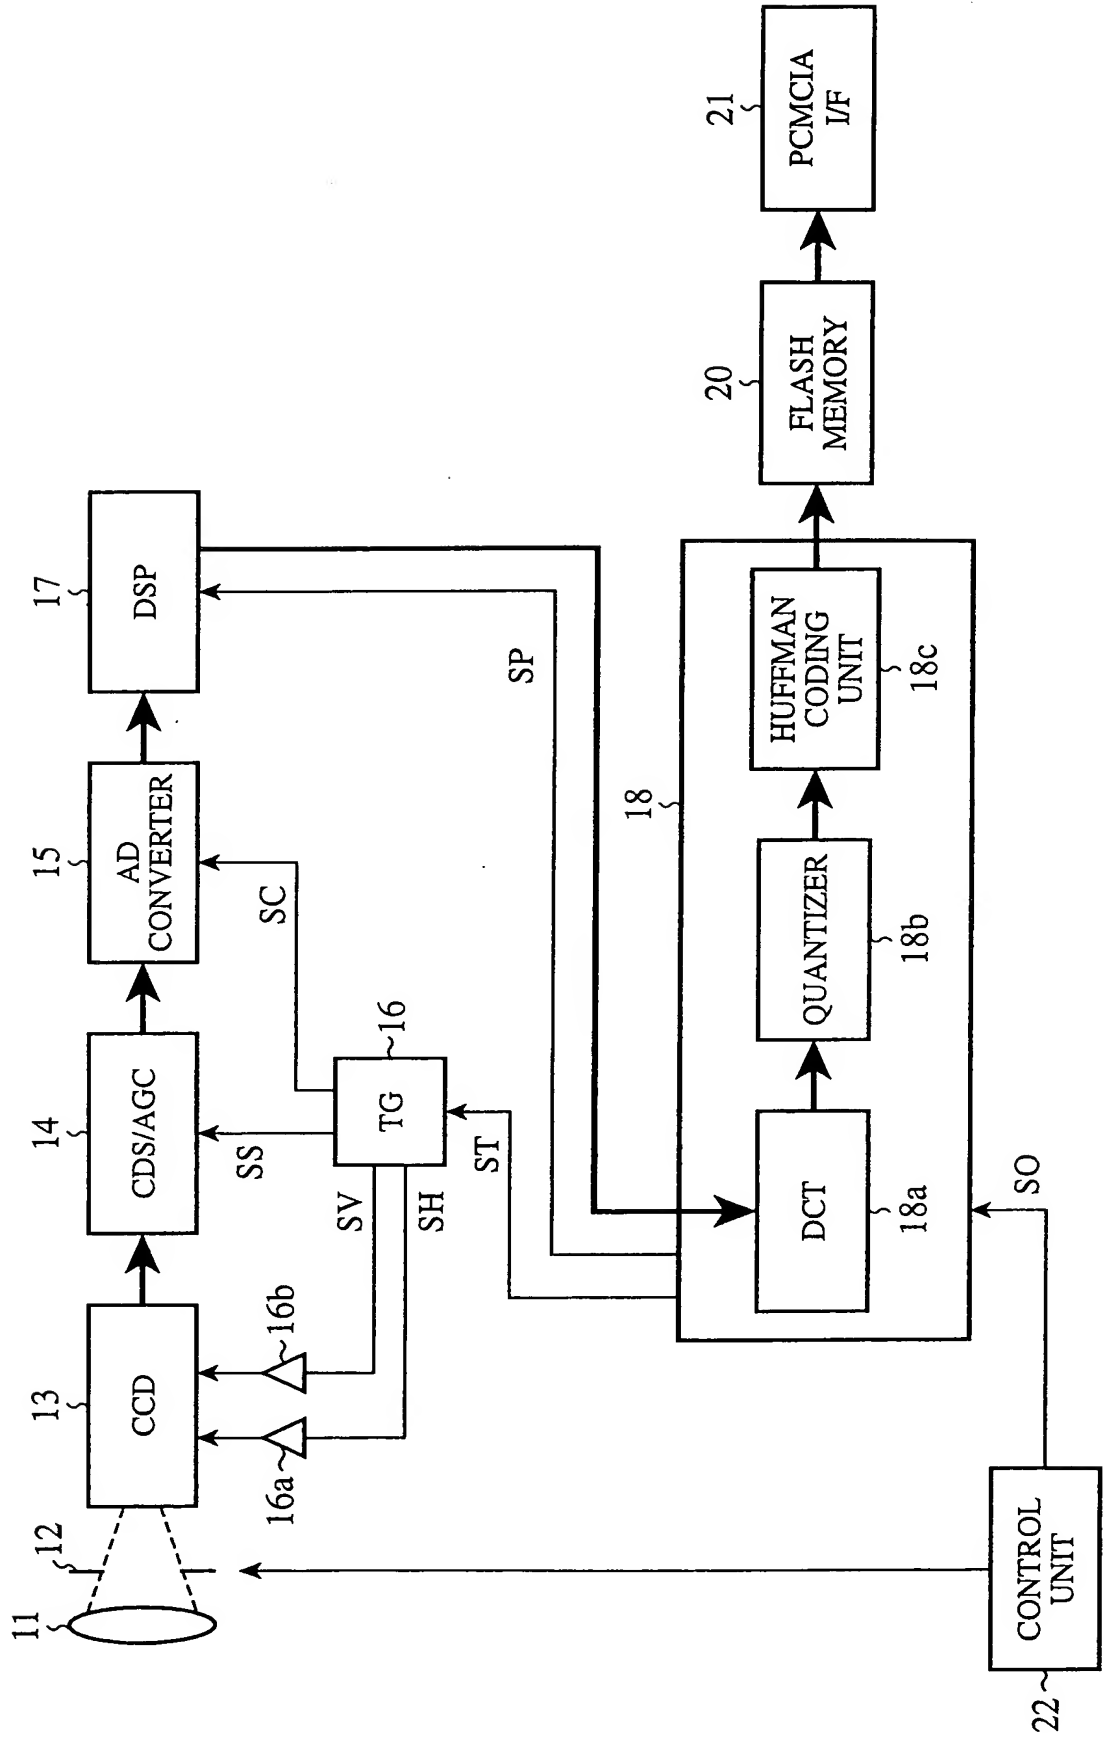


FIG. 2

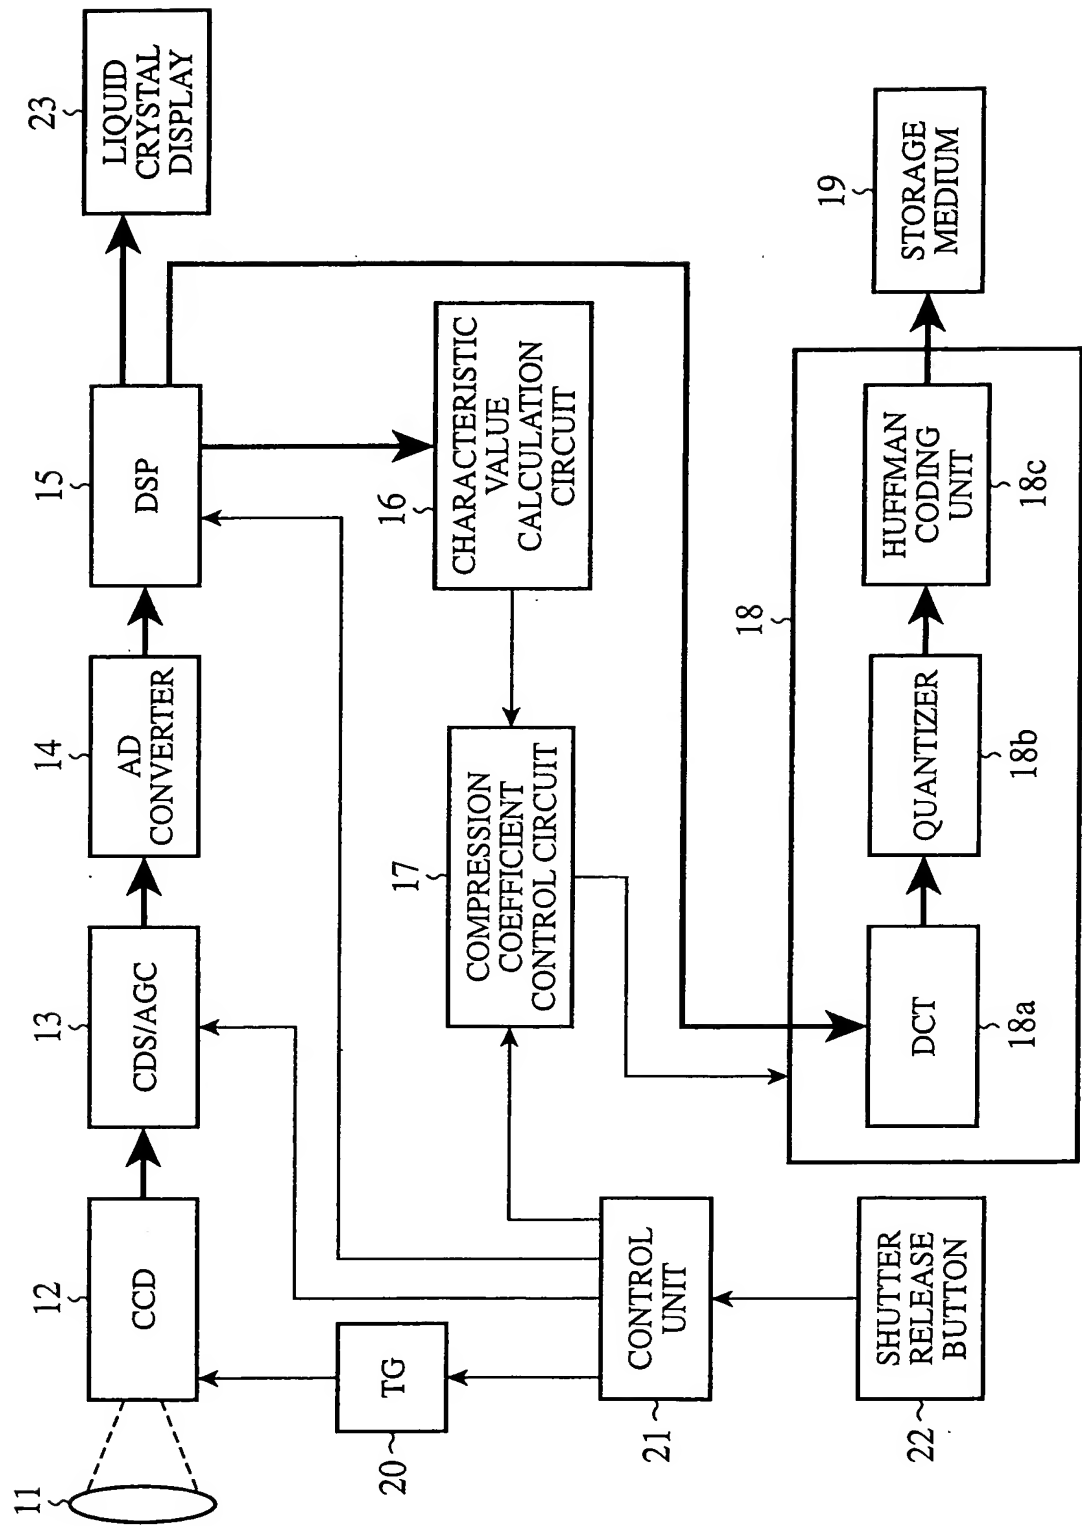


FIG.3

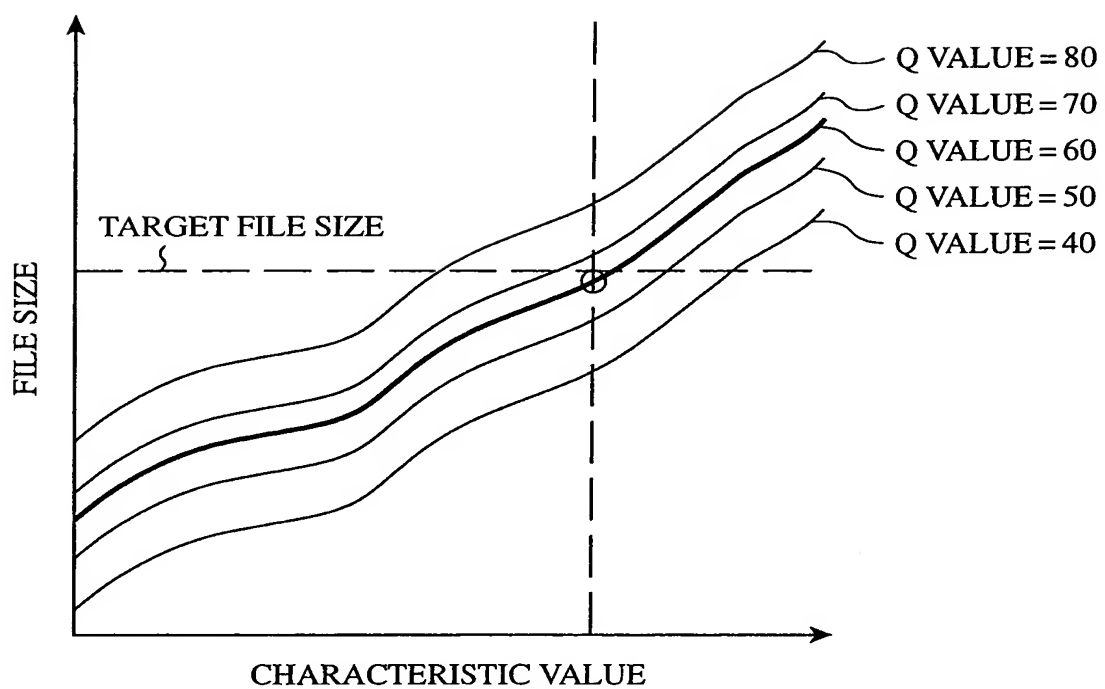


FIG.4

		AT TIME OF IMAGE PICKUP	
		CCD INTERMITTENT READING MODE	CCD ALL-PIXEL READING MODE
AT TIME OF CHECKING OF IMAGE OF OBJECT TO BE SHOT	CCD INTERMITTENT READING MODE	1.00	1.30
	CCD ALL-PIXEL READING MODE	0.77	1.00

FIG.5

RANGE OF FLUCTUATIONS IN CHARACTERISTIC VALUE	ADDITIONAL CORRECTION COEFFICIENT
0.00 - 1.00	1.00
1.00 - 2.00	1.10
2.00 - 4.00	1.20
4.00 - 8.00	1.35
8.00 - 16.00	1.50

FIG. 6

